

Release Notes

Polycom® QDX 6000™, Version 4.0.1



POLYCOM®



PLEASE NOTE 4.0.1 UPGRADE DEPENDENCY: Customers who used data pass through in 4.0 will need to use a new cable after the upgrade. The part number for the new Data Pass-Through cable is 2457-32892-001. Please contact your reseller or Polycom Sales team to acquire the new cable before the upgrade, if you currently use this feature.

Polycom is pleased to announce the software release of Polycom QDX 6000. This document provides information about the Polycom QDX 6000 system and version 4.0.1 software.

For more information about using the features described in this document, refer to the product documentation available at www.polycom.com.

New Hardware

This section describes new Polycom QDX 6000 hardware.

Polycom EagleEye View Camera



Polycom introduces the new, exclusive Polycom EagleEye View Camera. The Polycom EagleEye View camera is an electronic pan, tilt, and zoom (EPTZ) camera that includes built-in stereo microphones. The Polycom EagleEye View camera can be mounted in either the upright or inverted position. Other features include manual focus and privacy shutter.


The Polycom EagleEye View is available with the Polycom QDX 6000 system as system camera and the main microphone. In addition, the Polycom EagleEye View can be used as a second PTZ camera.

To use the polycom EagleEye View camera, systems must be running version 4.0.1 or later.


July 2010

3725-82578-401/A

Polycom EagleEye View Camera as the main PTZ control camera

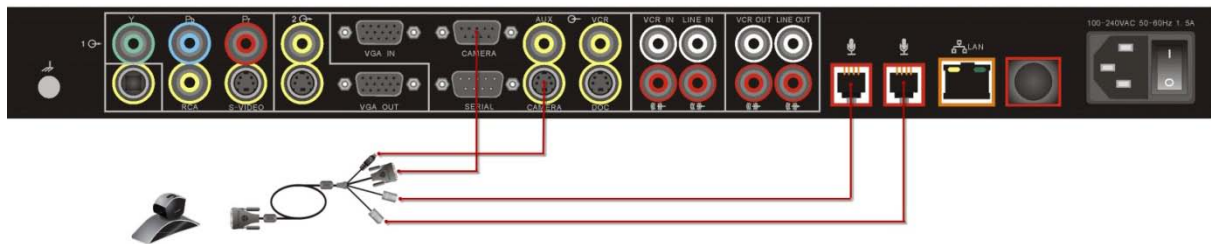

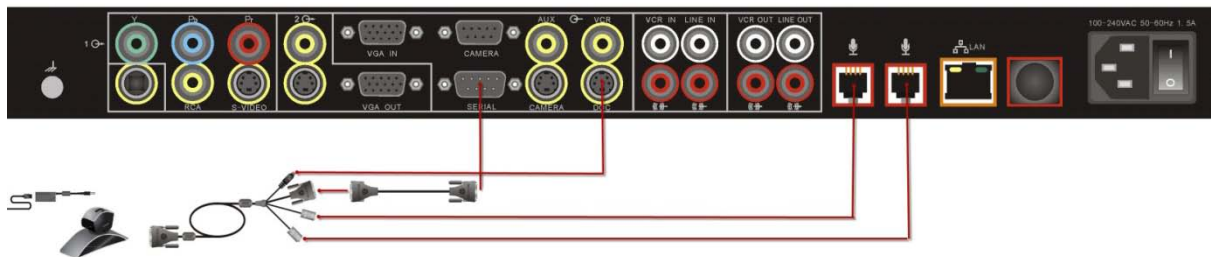


Polycom EagleEye View Camera as the second PTZ control camera



Note: The part number of the serial port cable for second PTZ camera control is 2457-32891-001.

New Cables

The Polycom QDX 6000 has the following additional cables.

Cables	Description
 PN: 2457-32890-001	An EagleEye View camera cable. One end of this cable is an HDCI connector to the EagleEye View camera, the other end breaks out to the following connectors, <ul style="list-style-type: none"> ▪ A DB-9 male connector to QDX serial port for camera control. ▪ An S-Video connector to QDX camera input. ▪ Two RJ-9 connectors to QDX MIC inputs.
 PN: 2457-32892-001	A DB-9, male-female, serial port cable for transparent data pass through;
	A DB-9, female-female, serial port cable for second camera PTZ control.

Cables	Description
PN: 2457-32891-001	

What's New in Version 4.0.1

The version 4.0.1 software includes the features and functionality of version 4.0.0, with the following additions.

Multicast

You can configure the QDX 6000 system to allow users to stream audio and video from one to many viewers. Viewers watch the conference from the system's web interface. You can start streaming only when QDX 6000 is in a call.

Points to note about streaming:

- To send a stream across a subnet, multicasting must be enabled on the network or you must unicast to a particular IP address, which will forward the stream to that IP address regardless of the location destination.
- The number of viewers is limited only by your network topology.



To configure the QDX system for a streaming call:

- 1** Go to **System > Admin Settings > Network > IP > Multicast**.
- 2** Configure these settings:

Setting	Description
Enable Multicast	Specifies whether users can start streaming from the system by making the Multicast option available on the Utilities screen of the system's web interface.
Multicast Address	Specifies the multicast address used for the system. The default address is 239.0.0.1. This could be the unicast location of your streaming server.

Setting	Description
Audio Port	Specifies the fixed port used for audio. This can be changed if you need to go through a firewall.
Video Port	This value is automatically assigned by QDX. This cannot be changed.
Multicast Content Video	Specifies whether to stream the content video in a call.
Multicast Far Video	Specifies whether to stream the far site people video in a call.
Multicast Local Video	Specifies whether to stream the local people video in a call.

To stream a conference:

- 1 Go to **System > Admin Settings > Network > IP > Multicast**, select the **Enable Multicast** option.
- 2 Go to **System > Admin Settings > General Settings > Security > Security Settings >  > **, enable **Allow Video Display on Web**.
- 3 In the browser address line, enter the system's IP address, for example, `http:// 10.11.12.13`, to go to the system's web interface. Go to **Admin Settings > General Settings > Security**, set the Remote Access password and the Meeting password.
- 4 Place the video call to other participants.

You can start streaming only when QDX 6000 is in a call.

To stop streaming a conference:

- 1 Go to **System > Admin Settings > Network > IP > Multicast**.
- 2 Clear the **Enable Multicast** selection.

To view a streamed conference:

- 1 On a computer running Windows XP or Windows Vista operating system, open an Internet Explorer 6.x, 7.x, or 8.x.

- 2 In the browser address line, enter http://xxx.xxx.xxx.xxx/m_multicast.htm, where “ xxx.xxx.xxx.xxx” is the QDX 6000 system's IP address.
- 3 In the prompted window, enter the user name "meeting" and the meeting password set on your QDX 6000 system.

The stream starts automatically.

To stop viewing the streamed conference:

Close the web browser.


This stops the stream but does not end the call.

Camera Control for the Second PTZ Camera

QDX 6000 V4.0.1 supports camera control for the second PTZ camera.

To connect a second PTZ camera to the QDX 6000 system:

- 1 Connect a second camera supporting PTZ, such as Polycom EagleEye View camera, to DOC camera input and serial control. Polycom provided female-male convert cable (labeled as “2ND CAMERA”) **MUST** be used to connect the second camera serial port to the QDX serial control port.

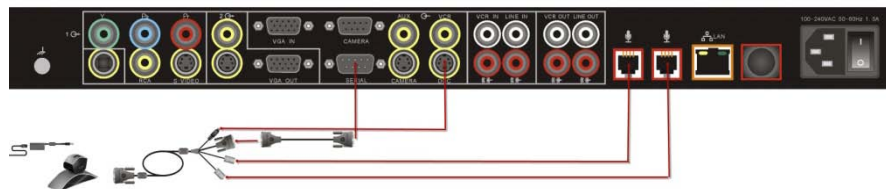

Note: The part number of the serial port cable for second PTZ camera control is 2457-32891-001. This cable can be easily recognized by the “2ND CAMERA” label on one end of the cable.

- 2 Set Doc camera as video source.
- 3 Go to **System > Admin Settings > General Settings > Serial Ports**, and set **RS-232 Mode** to **Camera PTZ**. Then click **Detect Camera** to detect the camera manually.

Notes:

- IR signal cannot be received through the second PTZ camera.

- PTZ speed setting is not available for this camera.

Others

Feature	Description
G.719 support	G.719 audio protocol is supported in both H.323 and SIP calls on a Polycom QDX 6000 system.
Siren 14 stereo support	Siren 14 stereo is supported on a Polycom QDX 6000 system.
Support for H.264 4CIF/4SIF at all data rates	H.264 4CIF/4SIF calls are supported at data rates above 2Mbps on a Polycom QDX 6000 system.
Live music mode support	<p>In live music mode, the system transmits audio using a configuration that best reproduces live music picked up by microphones.</p> <p>To enable live music mode, go to System > Admin Settings > Audio > Audio Settings.</p> <p>Notes: Noise suppression and automatic gain control are disabled when this setting is enabled.</p>

Corrected Issues in 4.0.1

The following table lists corrected issues in version 4.0.1.

Category	Issue ID	Found in Release	Descriptions
Content	BROAD-892	4.0.0	H.264 content couldn't be negotiated in H323 calls above 1920kbps. This issue has been corrected.
Interoperability Polycom® VSX	BROAD-871	4.0.0	QDX is not negotiating stereo audio with VSX. This issue has been corrected.
Data Pass Through	BROAD-1184	4.0.0	Data pass through may output garbage data at system start up time.

Category	Issue ID	Found in Release	Descriptions
			<p>This issue is corrected with the help of a special cable. Please use the Polycom provided data pass through cable to eliminate garbage data at system start up.</p> <p>You may use a normal serial cable for extension, but the Polycom cable must be connected to the QDX serial control port.</p> <p>Note: The part number of the serial cable provided by Polycom is 2457-32892-001. It is easily recognizable by the “DATA” label on one end of the cable.</p>
Interoperability Radvision IP/ISDN Gateway	QDX-271	4.0.0	QDX 6000 cannot dial into a Radvision IP/ISDN gateway traversing NAT. This issue has been corrected.

Known limitations

The following table lists the known limitations for the version 4.0.1 release. If a workaround is available, it is noted in the table.

Category	Issue ID	Found in Release	Descriptions	Workaround
Audio	BROAD-984	4.0.1	Hot-plug the EagleEye View Camera’s microphone might change the system’s mute status.	Use remote control to correct the mute status.
Interoperability Polycom VSX	BROAD-978	4.0.1	In SIP calls to the Polycom VSX system, QDX 6000 does not negotiate transmitting stereo audio.	Use call rates lower than 384 kbps (including 384 kbps), or higher than 768 kbps.
Interoperability Sony PCS-XG80	BROAD-1147	4.0.1	Sony PCS-XG80 is unable to send H.239 content to QDX 6000 when connecting to high resolution content source.	Reduce the resolution of Sony content to 1280x720 or lower.
Interoperability Sony PCS-XG80	BROAD-1146	4.0.1	Occasionally, QDX 6000 crashes when the Sony PCS-XG80 sends content when connecting to high resolution content	Reduce the resolution of Sony content to 1280x720 or lower.

Category	Issue ID	Found in Release	Descriptions	Workaround
			source.	
Interoperability Tandberg MXP	BROAD-1139	4.0.1	Call rates higher than 1920 kbps will down-speed to 1920 kbps when QDX 6000 makes a SIP call with Tandberg MXP.	None
Interoperability FX	BROAD-829	4.0.0	People+Content does not work in calls between Polycom QDX 6000 and FX.	None
Interoperability Tandberg MXP	BROAD-361	4.0.0	Encryption check codes on Tandberg MXP and QDX 6000 do not match.	None
Hardware	BROAD-914	4.0.1	The RS-232 Flow Control is not supported when the RS-232 mode is set to Pass Thru.	None
Multicast	BROAD-1097	4.0.1	System pop up an error dialog "cannot create overlay" while reopening the multicast page.	Close the web browser and reopen.
TV UI	BROAD-793	4.0.0	When 802.1x is enabled on the system, the EAP authentication status does not update if the LAN cable is disconnected.	None
Camera	BROAD-1087	4.0.1	Occasionally, the EagleEye camera as the 2 nd camera shows blue screen.	Manually detect the EagleEye camera.
Camera	BROAD-965	4.0.1	Sometimes the 2nd PTZ camera cannot be detected automatically.	Manually detect the EagleEye camera.
Interoperability Polycom RMX 2000	BROAD-1185	4.0.1	In SIP calls with Polycom RMX2000, Polycom QDX 6000 receives H.263 4CIF video instead of H.264 1024x576 video at call rate of 768 kbps.	1. Let QDX dial into RMX2000; 2. Use call rate other than 768 kbps.
Interoperability Tandberg MXP	BROAD-1183	4.0.1	In HD calls with Tandberg MXP, the lip sync of Polycom QDX 6000 is slightly off.	None

Interoperability

Polycom QDX 6000 systems are tested extensively with a wide range of products. The following list is not a complete inventory of compatible equipment; it simply indicates the products that have been tested for compatibility with the 4.0.1 release.

Video conferencing systems use a variety of algorithms to compress audio and video. In a call between two systems, each end transmits audio and video using algorithms supported by the other end. In some cases, a system may transmit a different algorithm than it receives. This process occurs because each system independently selects the optimum algorithms for a particular call, and different products may make different selections. This process should not affect the quality of the call.

Type	Product	Version
Management Systems and Recorders	Polycom RSS 4000	5.0.0
	Polycom RSS 2000	4.0.0.001 360
Gatekeeper, Gateways, External MCU, Bridges, Call Managers	Cisco 3745	12.4
	Codian 4505	4.0 (1.44)
	Polycom CMA 4000, CMA 5000	4.0.1/5.0.0
	Polycom ReadManager SE200	3.0.6 ER05
	Polycom PathNavigator	7.0.12
	Polycom RMX 1000	2.1.0-16612
	Polycom RMX4000	6.0.0.105
	Polycom RMX2000	6.0.0.105
	Polycom DMA7000	2.0.0.22
	Polycom MGC	9.0.3.1
	RADVISION ECS	5.6.2.4
	TANDBERG Gatekeeper	N6.1
Endpoints	Aethra X3	12.1.19
	Aethra X7	12.1.7
	LifeSize Room	4.5.1(34)
	Polycom CMAD	4.1.2.0178 and 5.0.0.0203
	Polycom iPower 9000	6.2.0.1208
	Polycom PVX	8.0.4
	Polycom RSS 4000	6.0.0
	Polycom V500, Polycom V700™	9.0.6
	Polycom ViewStation	512 7.5.4

Type	Product	Version
	Polycom ViewStation	FX 6.0.5
	Polycom SoundPoint® IP 601	3.1.3.0439
	Polycom VVX1500	3.2.2.0481
	Polycom SoundStation IP 3000	2.8
	Polycom SoundStation IP 4000	3.1.1.0137
	Polycom VSX 3000, VSX 5000, VSX 6000, VSX 7000, VSX 7000e, VSX 8000	9.0.6
	Sony PCS-1	3.42
	Sony PCS-G50	2.70
	Sony PCS-G70	2.63
	Sony PCS-XG80	2.0.4
	Sony PCS-TL50	2.42
	TANDBERG 6000 B Series	B10.3
	TANDBERG 6000 E Series	E5.3
	TANDBERG C20	3.0.0.211036
	TANDBERG E20	2.1.0.2069545
	TANDBERG 150 MXP	L5.1
	TANDBERG 6000 MXP	F8.2

Copyright Information

© 2010 Polycom, Inc. All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Polycom, Inc. Polycom, Inc. retains title to, and ownership of, all proprietary rights with respect to the software contained within its products. The software is protected by United States copyright laws and international treaty provision.

License Issues

OpenSSL License

Copyright (c) 1998-2007 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1 Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2 Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3 All advertising materials mentioning features or use of this software must display the following acknowledgment:

"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)"

- 4 The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
- 5 Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.

- 6 Redistributions of any form whatsoever must retain the following acknowledgment:

"This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ``AS IS''
AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT

NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

Original SSLeay License

Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com) All rights reserved.

This package is an SSL implementation written by Eric Young (eay@cryptsoft.com). The implementation was written so as to conform with Netscape's SSL.

This library is free for commercial and non-commercial use as long as the following conditions are adhered to. The following conditions apply to all code found in this distribution, be it the RC4, RSA, lhash, DES, etc., code; not just the SSL code. The SSL documentation included with this distribution is covered by the same copyright terms except that the holder is Tim Hudson (tjh@cryptsoft.com).

Copyright remains Eric Young's, and as such any Copyright notices in the code are not to be removed.

If this package is used in a product, Eric Young should be given attribution as the author of the parts of the library used. This can be in the form of a textual message at program startup or in documentation (online or textual) provided with the package.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1 Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.

2 Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3 All advertising materials mentioning features or use of this software must display the following acknowledgement:

"This product includes cryptographic software written by Eric Young (eay@cryptsoft.com)"

The word 'cryptographic' can be left out if the routines from the library being used are not cryptographic related :-).

4 If you include any Windows specific code (or a derivative thereof) from the apps directory (application code) you must include an acknowledgement:

"This product includes software written by Tim Hudson (tjh@cryptsoft.com)"

THIS SOFTWARE IS PROVIDED BY ERIC YOUNG ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The license and distribution terms for any publically available version or derivative of this code cannot be changed. I.e. this code cannot simply be copied and put under another distribution license [including the GNU Public License.]

Disclaimer

This software is provided 'as is' with no explicit or implied warranties in respect of its properties, including, but not limited to, correctness and fitness for purpose.

Trademark Information

© 2010, Polycom, Inc. All rights reserved. POLYCOM®, the Polycom "Triangles" logo and the names and marks associated with Polycom's products are trademarks and/or service marks of Polycom, Inc. and are registered and/or common law marks in the United States and various other countries. All other trademarks are property of their respective owners. No portion hereof may be reproduced or transmitted in any form or by any means, for any purpose other than the recipient's personal use, without the express written permission of Polycom.