



Release Notes

3.7 | February 2017 | 3725-82878-019A1

Polycom[®] RealPresence[®] Mobile for Apple[®] iOS



Copyright© 2013-2017, Polycom, Inc. All rights reserved. No part of this document may be reproduced, translated into another language or format, or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Polycom, Inc.

6001 America Center Drive
San Jose, CA 95002
USA

Trademarks Polycom®, the Polycom logo and the names and marks associated with Polycom products are trademarks and/or service marks of Polycom, Inc. and are registered and/or common law marks in the United States and various other countries.



All other trademarks are property of their respective owners. No portion hereof may be reproduced or transmitted in any form or by any means, for any purpose other than the recipient's personal use, without the express written permission of Polycom.

End User License Agreement By installing, copying, or otherwise using this product, you acknowledge that you have read, understand and agree to be bound by the terms and conditions of the End User License Agreement for this product. The EULA for this product is available on the Polycom Support page for the product.

Patent Information The accompanying product may be protected by one or more U.S. and foreign patents and/or pending patent applications held by Polycom, Inc.

Open Source Software Used in this Product This product may contain open source software. You may receive the open source software from Polycom up to three (3) years after the distribution date of the applicable product or software at a charge not greater than the cost to Polycom of shipping or distributing the software to you. To receive software information, as well as the open source software code used in this product, contact Polycom by email at OpenSourceVideo@polycom.com.

Disclaimer While Polycom uses reasonable efforts to include accurate and up-to-date information in this document, Polycom makes no warranties or representations as to its accuracy. Polycom assumes no liability or responsibility for any typographical or other errors or omissions in the content of this document.

Limitation of Liability Polycom and/or its respective suppliers make no representations about the suitability of the information contained in this document for any purpose. Information is provided "as is" without warranty of any kind and is subject to change without notice. The entire risk arising out of its use remains with the recipient. In no event shall Polycom and/or its respective suppliers be liable for any direct, consequential, incidental, special, punitive or other damages whatsoever (including without limitation, damages for loss of business profits, business interruption, or loss of business information), even if Polycom has been advised of the possibility of such damages.

Customer Feedback We are striving to improve our documentation quality and we appreciate your feedback. Email your opinions and comments to DocumentationFeedback@polycom.com.

Polycom Support Visit the [Polycom Support Center](#) for End User License Agreements, software downloads, product documents, product licenses, troubleshooting tips, service requests, and more.

Contents

What's New in Release 3.7	4
Audio Enhancement	4
Video Enhancements	4
UI Enhancements	4
CallTo Feature Support	4
New Device Support	4
New OS Support	5
Release History	6
Hardware and Software Requirements	8
Polycom® CMA® System and Polycom® RealPresence® Resource Manager System	8
Products Tested with this Release	9
Install and Uninstall RealPresence Mobile	10
System Capabilities and Constraints	11
Capabilities	11
Protocols	11
Resolutions	11
Algorithms	12
Inbound and Outbound Ports	12
Known Issues	14
Resolved Issues	15
Interoperability Issues	16
Enterprise Scalable Video Coding (SVC) Solution	18
Access Media Statistics	19
Prepare Your Device for Mutual Transport Layer Security	21
Get Help	23
The Polycom Community	23
About Section 508 Accessibility Standards	23

What's New in Release 3.7

The Polycom® RealPresence® Mobile video collaboration software 3.7 release includes the following features.

Audio Enhancement

Audio experience is enhanced by adopting audio codecs per call rates. Low bit rate Polycom® Siren™ Lost Packet Recovery (LPR) technologies, including Polycom® Siren™ 32 and Polycom® Siren™ 24, are now supported. This enables the RealPresence Mobile application to accept incoming Siren LPR streams of any bit rates.

Video Enhancements

The Polycom® Dynamic Bandwidth Allocation (DBA) algorithm is now supported for both incoming and outgoing AVC calls. For environments or situations where consistent packet loss is noted, Polycom's DBA capability is used in conjunction with Polycom Lost Packet Recovery (LPR) to dynamically adjust the video bit rate to eliminate or avoid packet loss.

UI Enhancements

UI design for the home page is optimized for Apple iPad. You can now choose whether to go directly to **Place a Call**, or **Connect to Room** when you start up the application.

CallTo Feature Support

The RealPresence Mobile application can now serve as the default program to open CallTo links included in calendar, email, and Google® Chrome applications. When you click a CallTo link, the RealPresence Mobile application launches automatically to dial the number included in the link.

Supported URL Formats

You can include CallTo links in URLs in this format:

```
callto:dial_string/h323:dial_string/sip:dial_string
```

The `callto:`, `h323:`, and `sip:` prefixes can be in uppercase, lowercase, or initial capitalized.

The “dial_string” can be any valid dial strings supported by the RealPresence Mobile application.

Supported Email Formats

You can include CallTo links in the following email formats:

- HTML
- Rich text

New Device Support

The RealPresence Mobile application now supports the Apple® iPad Pro (9.7 inch, 12.9 inch), iPhone SE, iPhone 7, and iPhone 7 plus.

New OS Support

The RealPresence Mobile application now supports the iOS 10.

Release History

The following table shows the release history of the Polycom RealPresence Mobile application.

Version	Release Date	Features
3.7	December 2016	Audio enhancement Video enhancements UI enhancements CallTo feature support New device support New OS Support
3.5.1	April 2016	Constant Bitrate (CBR) adopted for video codecs Bug fixes and feature enhancements
3.5	January 2016	Polycom® Concierge Solution support for Apple iPhones TLSv2 support SmartPairing support for Polycom® RealPresence Debut™ products New devices support
3.4.1	July 2015	Support for Cloud Services
3.4	June 2015	Profile Photo and Virtual Business Card Feature Mid-string Search of Favorites Support for Polycom® NoiseBlock™ In-call Toolbar User Interface Enhancement Support for 64-bit iOS Platform
3.3	January 2015	Support for BroadSoft Device Management as Provisioning Server User Interface Improvements Standalone mode provides more features. See System Capabilities and Constraints for a complete list of feature capabilities. Support for high video resolution (720p) on powerful mobile devices such as iPad Air and iPad Mini 2, for AVC point to point calls, AVC multi-points calls, and SVC point to point calls. Support for the SDP Size Adjustment Feature Devices Support Changes <ul style="list-style-type: none">• Drop support for iOS 6• Add support for iOS 8• Add support for iPad Air 2 and iPad Mini 3• Add support for iPhone 6 and iPhone 6 Plus

Version	Release Date	Features
3.2.1	July 2014	The Roster display button is not shown in CloudAXIS 1.5 and earlier versions. Fixed an OpenSSL security vulnerability (CVE-2014-0224). Fixed two issues. See Resolved Issues for details.
3.2	June 2014	Support for CloudAXIS HTTPs tunneling Support for roster display in a CloudAXIS meeting Support for log collector Support for Czech Support for iPad Air and iPad Mini with Retina display

Hardware and Software Requirements

The following hardware and software requirements were determined based on test scenarios. Your system's actual performance may vary based on software or hardware configurations.

Items	Description
Apple	iPad iPad 4, iPad Air, iPad Air 2, iPad Mini 2, iPad Mini 3, iPad Mini 4, iPad Pro iPhone iPhone 5C, iPhone 5s, iPhone 6, iPhone 6s, iPhone 6s Plus, iPhone 6 Plus, iPhone7, iPhone 7 plus, iPhone SE
iOS Requirements	iOS 9 and 10
System Requirements	Syncing with iTunes® on a Mac or PC requires: <ul style="list-style-type: none">• iTunes: 10.2 or later• Mac: OS X 10.9 or later• PC: Windows XP SP3 or later
Network Requirements	Wireless Local Area Network (WLAN), 802.11 a/b/g/n recommended 3G or 4G network
Optional Peripheral Devices	3.5 mm headset Stereo Bluetooth headset

To view your iOS system version:

- » From your device, tap **Settings > General > About > Version**.

Polycom® CMA® System and Polycom® RealPresence® Resource Manager System

The RealPresence Mobile application can register to the Polycom® CMA® Server and Polycom® RealPresence® Resource Manager server. Some management features have limitations relative to other Polycom endpoints. For example, software updates of RealPresence Mobile are not supported and the QOS monitoring is limited.

Products Tested with this Release

Polycom RealPresence Mobile systems are tested extensively with a wide range of products. The following table does not provide a complete inventory of compatible equipment, but indicates the products that have been tested for compatibility with this release.

Type	Product	Version
Gatekeeper, Gateways, External MCU, Bridges, Call Managers	Polycom® Distributed Media Application™ (DMA®) 7000	6.3, 6.4
	Polycom® RealPresence® Resource Manager	9.0, 10.0
	Polycom® RealPresence® Collaboration Server (RMX®) 4000/2000/1800/1500	8.6.4, 8.7.1
	Polycom® RealPresence® Collaboration Server (RMX®) 1000C	2.5.1
	Polycom® RealPresence® Collaboration Server Virtual Edition	8.6.4, 8.7.1
	Polycom® RealPresence® Media Suite	2.6, 2.7
	Polycom® RealPresence® Web Suite	2.0, 2.1
Endpoints	Polycom® RealPresence® Group Series	5.1.2, 6.0
	Polycom® HDX® Series	3.1.11
	Polycom® RealPresence® Desktop	3.6, 3.7
	Polycom® RealPresence® Mobile	3.5.1, 3.7
	Polycom® VVX®	5.4.3
	Polycom® RealPresence Debut™	1.1, 1.2
	Polycom® RealPresence Trio™	5.4.3
NAT/Firewall/Border Controller	Polycom® RealPresence® Access Director™	4.2.3
	Polycom® VBP® 7301	14.7.1
	ACME Packet Net-Net 3820	Firmware SCX6.3.0 MR-5 Patch 2
Third-Party Platforms	Broadsoft SIP Server	R21 SP1
	Broadsoft DMS	R21 SP1



You are encouraged to upgrade all your Polycom systems with the latest software before contacting Polycom support to ensure that the issue has not already been addressed by vendor software updates. Go to the [Polycom support](#) to find the current Polycom Supported Products matrix.

Install and Uninstall RealPresence Mobile

This section explains how to install and uninstall RealPresence Mobile.



To install the RealPresence Mobile application:

- 1 Go to the Apple Store, search for **Polycom** or **video conferencing** to find the RealPresence Mobile application.
- 2 Tap **Free** and then **INSTALL APP**.



RealPresence Mobile will consume one more license after upgrading from 3.0 or earlier version to version 3.1 or later versions. To release the old license, you must remove the old license manually or set the license reclaim cycle to be a small value (for example five minutes) on RealPresence Resource Manager.

To uninstall the RealPresence Mobile application:

- 1 Go to the device's application list.
- 2 Tap and hold  **Video** until it begins to jiggle.
- 3 Tap  and then tap **Delete**. Your user data is deleted when you uninstall this application.

System Capabilities and Constraints

The following protocols, resolutions, algorithms, and ports are supported for RealPresence Mobile.

Capabilities

Call Rate	Video Capability
1 Mbps	720p
512 kbps 384 kbps 256 kbps	480x270
128 kbps	240x135
64 kbps	Audio only

Protocols

The following table lists the protocols supported in this version of the RealPresence Mobile application.

Protocol	Description
DNS	Domain Name System
H.235	Security and Encryption
H.239	Token Management
H.323	Signaling
H.460	Firewall/NAT Traversal
LDAP, H.350	Directory Services
NTLMv2	Authentication
Polycom® Lost Packet Recovery™ (LPR™)	Lost Packet Recovery
SIP	Session Initiation Protocol

Resolutions

The following table lists the resolutions supported in this version of the RealPresence Mobile application.

Resolution and Frame Rate	Source
Up to 720p, 15 fps	People video sent from camera
Up to 720p, 30 fps	People video received from far end

Resolution and Frame Rate	Source
Up to 720p (1280x720), 5 fps	Content received from far end
Up to XGA (1024x768) / 5 fps	Content showing from the tablet



Actual transmitted video resolution is determined by several factors, such as camera capability, computer performance, network conditions, the far-end system's capabilities, and whether content is being received.

HD/720p 30 fps is the maximum video receiving capability. The actual resolution is based on the negotiation with the far end.

Algorithms

The following table lists the algorithms supported in this version of the RealPresence Mobile application.

Algorithm Type	Description
Audio	G.722.1 Annex C G.711u G.711a Siren LPR Acoustic Echo Cancellation (AEC) Automatic Gain Control (AGC) Scalable Audio Coding (SAC)
Video	Polycom Lost Packet Recovery™ (LPR™) H.264 SVC H.264 AVC H.264 high profile H.263 and H.263+ (for content only) Note: H.261 is not supported.
Encryption	AES-128 media encryption TLS for SIP calls

Inbound and Outbound Ports

The following table lists the inbound and outbound ports supported in this version of the RealPresence Mobile application.

Port	Function
1720 (TCP)	H.323 Call Signaling (H.225)
1719 (UDP)	H.323 Registration, Admission, and Status (RAS)
3230 - 3250 (TCP)	H.323 Call Control (H.245)
3230 - 3250 (UDP)	Media (RTP/RTCP)

Port	Function
3238 (UDP and TCP)	BFCP
5060 (UPD and TCP)	SIP

Port	Function
443 (TCP)	Provisioning, Monitoring, Help Files, HTTPS
389 (TCP)	LDAP
5060 (UDP and TCP)	SIP
5061 (TCP)	SIP TLS signaling
1720 (TCP)	H.323 Signaling (H.225)
1719 (UDP)	H.323 Registration, Admission, and Status (RAS)
3230 - 3250 (TCP)	H.323 Control (H.245)
3230 - 3250 (UDP)	Media (RTP/RTCP)
3238 (UDP and TCP)	BFCP

Known Issues

The following table lists the known issues for this release. If a workaround is available, it is noted in the table.

Issue ID	Description	Workaround
SWEP-10627	The RealPresence Desktop cannot sign in successfully through Polycom RealPresence Access Director. The error message is 'Invalid server'.	Do the following: <ol style="list-style-type: none"> 1 From Polycom RealPresence Access Director administrator portal, go to Configuration > Access Proxy > Https proxy. 2 Change the rule of the Polycom RealPresence Resource Manager to make it the highest priority.
SWEP-10595	(iPhone only) The RealPresence Mobile application UI is not rendered properly if you turn off WIFI during a meeting created by the Polycom RealPresence® Web Suite application.	None.
SWEP-10435	You cannot share live streaming video from YouTube. The far ends always see a black content screen.	None. This is not a Polycom problem. The RealPresence Mobile application uses Apple API to capture content screenshots. However, this API doesn't support live streaming content.
SWEP-10140	The RealPresence Mobile application cannot re-register to the backup Polycom RealPresence DMA cluster after the primary super cluster fails. This is because the RealPresence Mobile application doesn't parse the TTL attributes under the "CNAME" header in DNS query responses.	None.
SWEP-9369	If you switch to another application when you are dialing a number, the RealPresence Mobile application crashes.	Avoid switching to another application while placing a call. Wait until the call completes to open other applications.
SWEP-7684	After you initiate a meeting as the only participant using an Apple iPhone, if you then hold your iPhone vertically, the RealPresence Mobile application video displays upside down.	None.

Resolved Issues

The following table lists the resolved issues in this release.

Issue ID	Description
SWEP-10004	If you switch between your home network and a VPN while the RealPresence Desktop is running, you may get disconnected from the provisioning server.
SWEP-9472	When exiting, the RealPresence Desktop sends a SIP REGISTER request to Polycom® RealPresence® DMA® system but then exits without waiting for a response from the latter. This causes exceptions in Polycom® RealPresence® DMA® system logs.
SWEP-9053	After some time in a call with content shared from a Polycom HDX system, your content window may show patches of green.
SWEP-8747	Polycom RealPresence Mobile application V3.5 or later cannot register with a VBP server that is using a Diffie-Hellman (DH) key smaller than 768 bit.
SWEP-8716	When you place an H.323 point-to-point call from the RealPresence Mobile application, the video protocol shown in the call statistics shows H264SVCHigh.
SWEP-7978	If you adjust the speaker volume of your RealPresence Mobile application to 80% or lower, the volume is barely audible.

Interoperability Issues

You may encounter the following issues when using RealPresence Mobile with other products or on specific operating systems.

Interoperability Issues

Limitation Type	Description	Solution
Limitations Related to Operation System or Devices	On some iPads with poor CPU performance, when RealPresence Mobile sends PDF content, the video may freeze on far ends every three seconds.	None
	Audio may stop in the first few seconds when plugging in an earphone in a call on iPhone 6.	None This is a device issue.

Interoperability Issues

Limitation Type	Description	Solution
Limitations Related to Other Polycom Products	If you create a Continuous Presence (CP) only conference call on Polycom RealPresence Collaboration Server (RMX) 4000/2000 system and Polycom RealPresence Collaboration Server 800s version 8.1 with default content settings (Content Settings: HiResGraphics and Content Protocol: H.264 HD), the RealPresence Mobile application cannot send or receive content if call rate is set as 384 kbps or below.	<ul style="list-style-type: none"> • Change the RealPresence Collaboration Server (RMX) Content Settings to Graphics, and Content Protocol to H.263 & H.264 Auto Selection. • Set the call rate on RealPresence Mobile to above 384 kbps.
	Polycom VSX® Visual Concert™ cannot display 1024x576 content sent by RealPresence Mobile, whether or not they call each other directly.	Double-click the content to show the content in full screen, then RealPresence Mobile will send 1024x768 content, and the Polycom VSX Visual Concert can display correctly.
	RealPresence Mobile may consume more than one license on RealPresence Resource Manager if you install and uninstall RealPresence Mobile several times.	Configure the reclaim period on RealPresence Resource Manager to a small value (for example five minutes).
	RealPresence Mobile supports only using English user names and password to sign in Polycom CMA server and RealPresence Resource Manager, or to register to a gatekeeper or an SIP server.	Use English user name and password.
	In a motion mode conference, RealPresence Mobile receives video with a long delay because the video is 60 fps.	Set a conference with sharpness mode on MCU.
	RealPresence Mobile in internet may fail to call Telepresence m100 in intranet.	Let Telepresence m100 call RealPresence Mobile.
	You may hear a short audio glitch on RealPresence Mobile when dialing in an SIP AVC encrypted conference created on the RealPresence Collaboration Server (RMX) 4000 with NGB.	None

Enterprise Scalable Video Coding (SVC) Solution

The Enterprise Scalable Video Coding (SVC) solution is an alternative to the AVC mode that has traditionally been supported. Differences between the two modes are listed in the following table.

SVC Mode	AVC Mode
Each participant in the conference call is received by the client as a separate video stream.	The composite video image is determined by the bridge based on administrator configuration.
A Caller ID is indicated by text in the appropriate window, on display throughout the call.	Caller ID information is displayed intermittently.
Double-clicking or tapping on a participant's video, content video, or local preview expands that video to full screen. Double-clicking or tapping again reverts the display to the composite image. Pinch controls enable you to zoom in and out on a participant's video or content video.	Layout may typically be controlled by dialing ** and then selecting a format.

The SVC solution provides the following features:

- For video send and receive, support up to 720p on high performance devices under 1 Mbps call rate.
- For video send, support 7.5/15 fps
- For video receive, support 7.5/15/30 fps
- Support auto layouts of 1x1, 1+1 through 1+5
The maximum layout of 1+5 comprises four remote participants plus one content-sharing frame, and one local preview frame
- Support for AVC content
- Support for Scalable Audio Coding (SAC) with at least two quality layers
- Ability to mix up to three different audio streams from the MCU
- Ability to combine up to four different SVC video streams (call rate at 512kbps and above) from the MCUs
- Support for SVC dial-out from RealPresence DMA

Using SVC conference calls has following limitations:

- Does not support recording
- Does not support Far-end Camera Control (FECC)
- In a SIP call, when networks using UDP experience 10 percent packet loss, the screen layout on received devices can be incorrect
- Does not support H.323 call
- In a poor network connection, sometimes a participant disconnects automatically from an SVC call. This can result in a frozen video stream of the participant. The RealPresence RMX system will clear the frozen stream in 30 minutes
- Do not use 128 kbps if you share content in a SVC call, otherwise people's video will freeze while sending or receiving content

Access Media Statistics

To access media statistics, click . The following table shows the meaning of each value.

Value	Description
Call Type	SIP or H.323 call type.
Call Encryption	Indicates whether your call is encrypted.
Far Site Name	Name of the far site.
Far Site System	Type of video conferencing system at the far end and the software version.
Call Speed	Negotiated speed (bandwidth) for the call, which is usually the combined video and audio speeds in the call.
Video Protocol	ITU-C video algorithm and annexes used in the current call. The video protocol used depends on the capabilities of the system at the far end as well as on your system's configuration.
Video Format	Picture size currently in use.
Audio Protocol	Audio algorithm and annexes used in the current call. The audio protocol used depends on the capabilities of the system at the far end as well as on your system's configuration.
Audio Rate	Bandwidth specified for the audio portion of the call. The proportion of the audio rate to the video rate depends on the protocol used.
Video Rate	Bandwidth specified for the video portion of the call. The proportion of the video rate to the audio rate depends on the protocol used.
Video Rate Used	Actual bandwidth being used for the video portion of the call. This is a real-time measurement, which normally fluctuates.
Video Frame Rate	Rate your system uses to update the picture seen at the far end. The system can send up to 15 fps. If the camera picks up large, continuous, or frequent motions, the software takes longer to assemble the data into video frames, and the frame rate drops. Changes in lighting also reduce the frame rate.
Video Packets Loss Percentage	Total video packet loss as a percentage of the total number of video packets transmitted by your system and those transmitted by the far end.
Video Jitter	Percentage of variation in the video transmission rate.
Audio Packet Lost	Number of audio data packets lost during the call, including transmitted packets and incoming packets. Packet loss indicates congestion or other problems on the network.
Audio Packets Loss Percentage	Total audio packet loss as a percentage of the total number of audio packets transmitted by your system and those transmitted by the far end.
Audio Jitter	Percentage of variation in the audio transmission rate.
Content Protocol	Format used for the recording, compression, and distribution of the content.
Content Format	Display resolution of the content.
Content Rate	Rate your system uses in content transmission.

Value	Description
Content Rate Used	Actual bandwidth being used for the content transmission.
Content Frame Rate	Rate your system uses in content frame transmission.
Content Packets Lost	Number of content data packets lost during the call, including transmitted packets and incoming packets. Packet loss indicates congestion or other problems on the network.
Content Packets Loss Percentage	Total audio packet loss as a percentage of the total number of content packets transmitted by your system and those transmitted by the far end.

Prepare Your Device for Mutual Transport Layer Security

You can establish secure communications using Mutual Transport Layer Security (MTLS) with provisioning servers such as Polycom RealPresence DMA or RealPresence Resource Manager systems.

To establish MTLS connections, the client and server need to hold certificates issued from the same Certificate Authority (CA) and the root certificate of this CA.

To import certificates into your iPad, you need to generate a Certificate Request (CSR) first by using a computer that has installed the OpenSSL tool. This is an iOS limitation.

The following example uses Mac as the example.

To generate and import your certificate:

- 1 Open the Terminal from your Mac computer.
- 2 Generate the private key *client.key*. For example:

```
Mike-MacBook-Pro:~ root# openssl genrsa -out client.key 1024
```
- 3 Generate the certificate request *client.csr*. For example:

```
Mike-MacBook-Pro:~ root# openssl req -new -key client.key -out client.csr
```
- 4 You are about to be asked to enter information that will be incorporated into your certificate request. Enter the Distinguished Name (DN) information that will be incorporated into your certificate request. You can leave some of the fields blank.
For som-----
Country Name (2 letter code) [GB]:cn ---CSR info.
State or Province Name (full name) [Berkshire]:bj ---CSR info.
Locality Name (eg, city) [Newbury]:bj ---CSR info.
Organization Name (eg, company) [My Company Ltd]:plcm ---CSR info.
Organizational Unit Name (eg, section) []:caqa ---CSR info.
Common Name (eg, your name or your server's hostname) []:caqa ---CSR info.
E-mail Address []:pp@pp.com ---CSR info.
- 5 Enter the following extra attributes to be sent with your certificate request. Write down the challenge password. You will need it later in the procedure.
A challenge password []:1234 -----see [Notel]
An optional company name []:poly
- 6 Submit the certificate request to your CA:
 - a View the content of the file *client.csr* using the following command, then select and copy its content (from ---BEGIN CERTIFICATE REQUEST to END CERTIFICATE REQUEST---):

```
Mike-MacBook-Pro:~ root# cat client.csr
```
 - b Go to your CA's web interface <http://<CA's IP address>/certsrv/>, and click **Request a certificate**.
 - c Click **Advanced certificate request**.
 - d Click **Submit a certificate request by using a base-64-encoded CMC or PKCS #10 file, or submit a renewal request by using a base-64-encoded PKCS #7 file**.

- e Paste the content of the file **client.csr** to the **Saved Request** text field, and click **Submit**.
- f Click **Base 64 encoded** and click **Download certificate**.

The file is saved as *certnew.cer* by default in the folder **Downloads**.

- 7 Move the generated **certnew.cer** file to your current directory.
- 8 Convert the file *ccertnew.cer* to a .p12 file by using the OpenSSL tool. For example:


```
Mike-MacBook-Pro:~ root#openssl pkcs12 -export -in certnew.cer -inkey client.key -out client.p12 -name testp12
```

 Enter Export Password:

Verifying - Enter Export Password:

The export password should be the same as the challenge password you set in Step 3.

- 9 Encrypt the challenge password you set in Step 3:
 - a Go to [Convert Strings](#).
 - b Enter the challenge password in the text field, and click **Base64 Encode!**.
 - c Copy the encoded text from the following text field, and save it as a .pwd file, for example, *client.pwd*.
- 10 Add both *client.p12* and *client.pwd* to your iPad using iTunes.

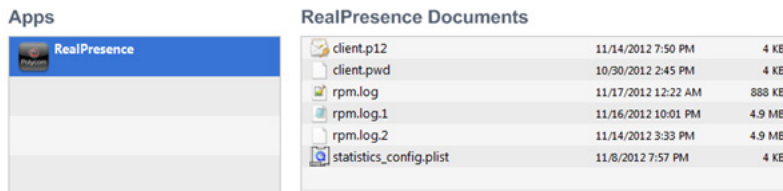

To import the root certificate of your CA into your iPad:

- 1 Go to your CA's web address <http://<MCA's IP address>/certsrv/>, click **Download a CA certificate, certificate chain, or CRL**.
 - 2 Select **Base 64**, and click **Download CA Certificate**.
 - 3 Send the certificate to your iPad as an email attachment.
 - 4 On your iPad, open the attached certificate from your email, and then click **Install**.
 - 5 When prompted to install the profile, tap **Install Now**, and then tap **Done**.
- The certificate is now installed on your iPad. You can find it from your iPad **Settings > General > Profile > Configuration Profiles**.



To establish MTLS connection with servers such as Polycom RealPresence DMA or RealPresence Resource Manager systems, these systems should also hold the CA root certificate and the system's certificates.

Get Help

For more information about installing, configuring, and administering Polycom products, refer to Documents and Downloads on the [Polycom Support](#) site.

To find all Polycom partner solutions, see the [Polycom Global Strategic Partner Solutions](#) site.

For more information on solution with this Polycom partner, see the partner site at [Polycom Global Strategic Partner Solutions](#).

The Polycom Community

The [Polycom Community](#) gives you access to the latest developer and support information. Participate in discussion forums to share ideas and solve problems with your colleagues. To register with the Polycom Community, create a Polycom online account. When logged in, you can access Polycom support personnel and participate in developer and support forums to find the latest information on hardware, software, and partner solutions topics.

About Section 508 Accessibility Standards

For information about how RealPresence Mobile conforms to the Section 508 Accessibility Standards, see [Voluntary Product Accessibility Template Reports](#).