

KIRK WIRELESS SERVER 1500 (ANALOG)

SERVICE NEWS 151

CONCERNING:

New software for KIRK Wireless Server 1500 with analog interface card

INFORMATION:

Release of new software for KIRK Wireless Server 1500 with analog interface card:


File name: 13300110_PCS_05J_.ktb

Features added:

- Disable time stamp sent to KIRK handsets.
Remark: Not all KIRK handsets support this feature.
- Possibility of inserting a pause in call back number (messaging).
The following characters will result in a pause between two DTMF ciphers s, S, p, P.
Ex. Call back number with pause 0p12345678.

Time stamp disabling procedure:

- Enter Command mode (Shift/CTRL+F12).
- Enter "N" in Command line.
- Activate "Send command".
- Enter "PpTimeOFF" in Command line.

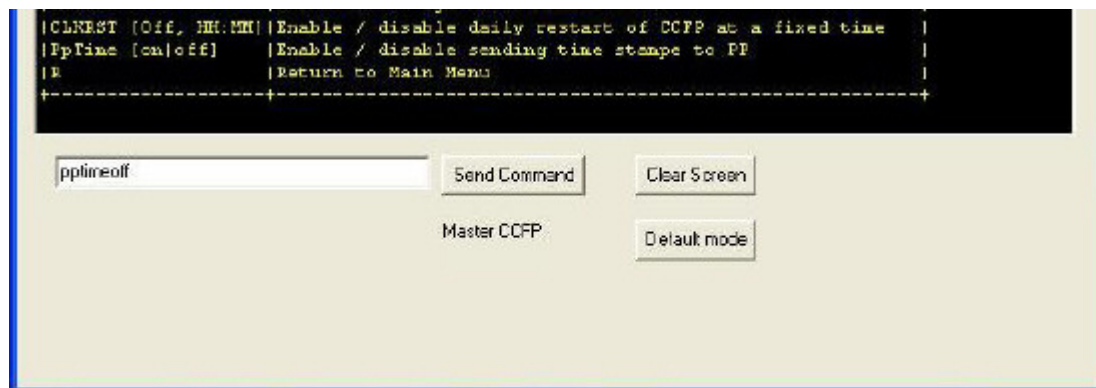

- Activate "Send command".
- The following text will appear:
*"pplineoff.
Sending timestamp to PP is disabled.
PP will therefore not display hour & minut after next location registration".*
- Activate "Default mode" - to return to normal operation.
- After handset has been powered off and on again, time stamp is no longer supported.

Note:

Deleting all user data by activating "Clear Master EEPROM" will activate the function again.

Units delivered from week 38 - year 2007 will be equipped with this version.

Please go to: www.kirktelecom.com/Installer/suk203.asp for download of this software version.